



Compressor
Voltage Code : TZ

TAJ5515E-TZ



Air Conditioning & Heating (CA)

400V 3~ 50Hz / 440V 3~ 60 Hz

R22

AJ5515E-TZ1C

Conditions	Frequency	Nominal Cooling Capacity		Sound Power ISO3745 / ISO 3743-1
		Watts	BTU/h	
CECOMAF / R22	50 Hz / 60 Hz	3190 / 3758	10877 / 12813	

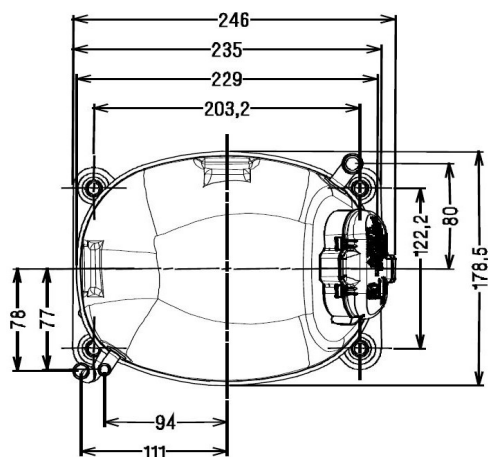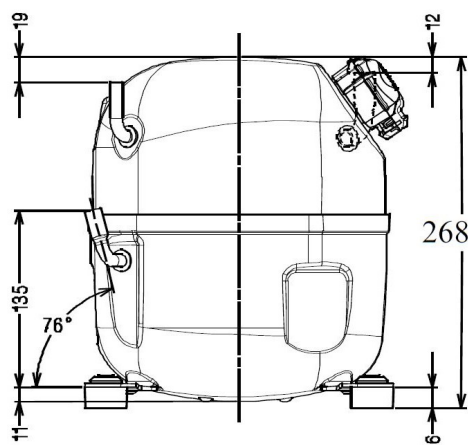

* CECOMAF : T°Cond. 55.0°C / T°Evap. 5.0°C / T°Return gas temp.. 32.0°C
T°Subcooling. 0.0K

Certificates :



Displacement (cc)	25,95
Net Weight (Kg)	21.0
Oil Quantity (cc)	475.0
Oil Type	Mineral
Expansion Device	Capillary_Tube/Expansion_Valve
Cooling	Fan
Main Winding (Ohm)	11.0
Current	
RLA (A)	2.7 2.9
MCC (A)	3.8 4
LRA (A)	18 18
Electrical Equipment	TRI
Overload	Interne
Refrigerating connection for	
Suction Tube	12.7 (1/2")
Discharge Tube	7.9 (5/16")
Process Tube	6.35 (1/4")

Note : Tecumseh reserves the right to change information contained in this document without notification.

TAJ5515E-TZ	Tension TZ : 400V 3~ 50Hz / 440V 3~ 60 Hz
--------------------	--

Les performances sont données dans les conditions CECOMAF :	Gaz aspirés :	32.0 °C
Condition Dew	Sous refroidissement :	0.0 K
The performance data are in CECOMAF conditions :	Return gas :	32.0 °C
Dew Condition	Subcooling :	0.0 K

50 Hz R22

N°331JL-TZ

4 T condensation	5 T évaporation	(°C)	-25	-20	-15	-10	-5	0	5	10	15
40	1 P frigorifique	(Watt)					2828	3449	4135	4883	5692
	2 P absorbée	(W)					1109	1165	1222	1280	1338
	3 I absorbée	(A)					2.09	2.16	2.23	2.30	2.37
50	1 P frigorifique	(Watt)						2896	3499	4154	4860
	2 P absorbée	(W)						1258	1343	1426	1507
	3 I absorbée	(A)						2.29	2.41	2.53	2.64
60	1 P frigorifique	(Watt)							2883	3451	4060
	2 P absorbée	(W)							1466	1574	1676
	3 I absorbée	(A)							2.59	2.75	2.91

60 Hz R22

N°331JL-TZ

4 T condensation	5 T évaporation	(°C)	-25	-20	-15	-10	-5	0	5	10	15
40	1 P frigorifique	(Watt)					3374	4090	4871	5715	6620
	2 P absorbée	(W)					1400	1487	1569	1644	1713
	3 I absorbée	(A)					2.17	2.26	2.35	2.45	2.56
50	1 P frigorifique	(Watt)						3434	4122	4862	5653
	2 P absorbée	(W)						1606	1725	1834	1933
	3 I absorbée	(A)						2.39	2.54	2.69	2.85
60	1 P frigorifique	(Watt)							3396	4040	4723
	2 P absorbée	(W)							1882	2024	2153
	3 I absorbée	(A)							2.73	2.93	3.14

1 = cooling capacity 2 = power input 3 = current 4 = condensing temperature 5 = evaporating temperature

Nota : Tecumseh se réserve le droit de modifier les informations contenues dans ce document sans préavis.

Note : Tecumseh reserves the right to change information contained in this document without notification.